

System Overview
BLX SURGERY

Roxolid® SLActive®



	Ø3.5 mm	Ø3.75 mm	Ø4.0 mm	Ø4.5 mm	Ø5.0 mm	Ø5.5 mm	Ø6.5 mm
	BLX RB (Regular Base) Ø3.5 mm 061.3312	BLX RB (Regular Base) Ø3.75 mm 061.3312	BLX RB (Regular Base) Ø4.0 mm 061.5312	BLX RB (Regular Base) Ø4.5 mm 061.6312	BLX WB (Wide Base) Ø5.0 mm 061.7312	BLX WB (Wide Base) Ø5.5 mm 061.8312	BLX WB (Wide Base) Ø6.5 mm 061.9312
6 mm	–	–	–	061.6306	061.7306	061.8306	061.9306
8 mm	061.3308	061.4308	061.5308	061.6308	061.7308	061.8308	061.9308
10 mm	061.3310	061.4310	061.5310	061.6310	061.7310	061.8310	061.9310
12 mm	061.3312	061.4312	061.5312	061.6312	061.7312	061.8312	061.9312
14 mm	061.3314	061.4314	061.5314	061.6314	061.7314	–	–
16 mm	061.3316	061.4316	061.5316	061.6316	061.7316	–	–
18 mm	061.3318	061.4318	061.5318	061.6318	061.7318	–	–


Implant Drivers




VeloDrill™ Alignment Pins
Depth Gauges

Drill No.	Diameter (Ø)	Short, L 34 mm	Long, L 42 mm	Alignment Pin	Depth Gauge
1	Ø2.2 mm	066.1301	066.1701	046.799	–
2	Ø2.8 mm	066.1302	066.1702	–	046.800
3	Ø3.2 mm	066.1303	066.1703	–	046.801
4	Ø3.5 mm	066.1304	066.1704	–	046.802
5	Ø3.7 mm	066.1305	066.1705	–	046.803
6	Ø4.2 mm	066.1306	066.1706	–	046.804
7	Ø4.7 mm	066.1307	066.1707	–	046.805
8	Ø5.2 mm	066.1308	–	–	046.806
9	Ø6.2 mm	066.1309	–	–	046.807

Closure Cap
H 0.4 mm



Healing Abutment



GH	Ø4.0 mm	Ø5.0 mm	Ø6.5 mm
1.5 mm	064.4202S	064.4212S	064.4222S
2.5 mm	064.4204S	064.4214S	064.4224S
3.5 mm	064.4206S	064.4216S	–

GH	Ø4.0 mm	Ø5.0 mm	Ø6.5 mm
1.5 mm	064.4203S	064.4213S	064.4223S
2.5 mm	064.4205S	064.4215S	064.4225S
3.5 mm	064.4207S	064.4217S	–

GH	Ø5.0 mm
1.5 mm	064.4232S

GH	Ø5.0 mm
1.5 mm	064.4233S

GH	Ø4.0 mm	Ø5.0 mm	Ø6.5 mm
1.5 mm	064.4202S	064.4212S	064.4222S
2.5 mm	064.4204S	064.4214S	064.4224S
3.5 mm	064.4206S	064.4216S	–

GH	Ø4.0 mm	Ø5.0 mm	Ø6.5 mm
1.5 mm	064.4203S	064.4213S	064.4223S
2.5 mm	064.4205S	064.4215S	064.4225S
3.5 mm	064.4207S	064.4217S	–

GH	Ø6.0 mm	Ø7.5 mm
0.75 mm	064.8201S	064.8203S
1.5 mm	064.8212S	064.8214S

GH	Ø6.0 mm	Ø7.5 mm
0.75 mm	064.8202S	064.8204S
1.5 mm	064.8213S	064.8215S

GH	Ø5.0 mm
1.5 mm	064.4232S


GH	Ø5.0 mm
1.5 mm	064.4233S

Auxiliary Instruments



BL Bone Profiler 1	026.0022
BL Bone Profiler 2	026.0023
BL Bone Profiler 3	026.0024
Guiding Pin for BLX Implants	066.0025S

Abutment removal kit			
RB/WB Abutment-Removal Screw	065.0007	for removal of damaged abutments, TAN	065.0007
Removal Tool	065.0008	for BLX Basal Screw, left-hand, length 27 mm, stainless steel	065.0008
	065.0009	for BLX Basal Screw, left-hand, length 21 mm, stainless steel	065.0009

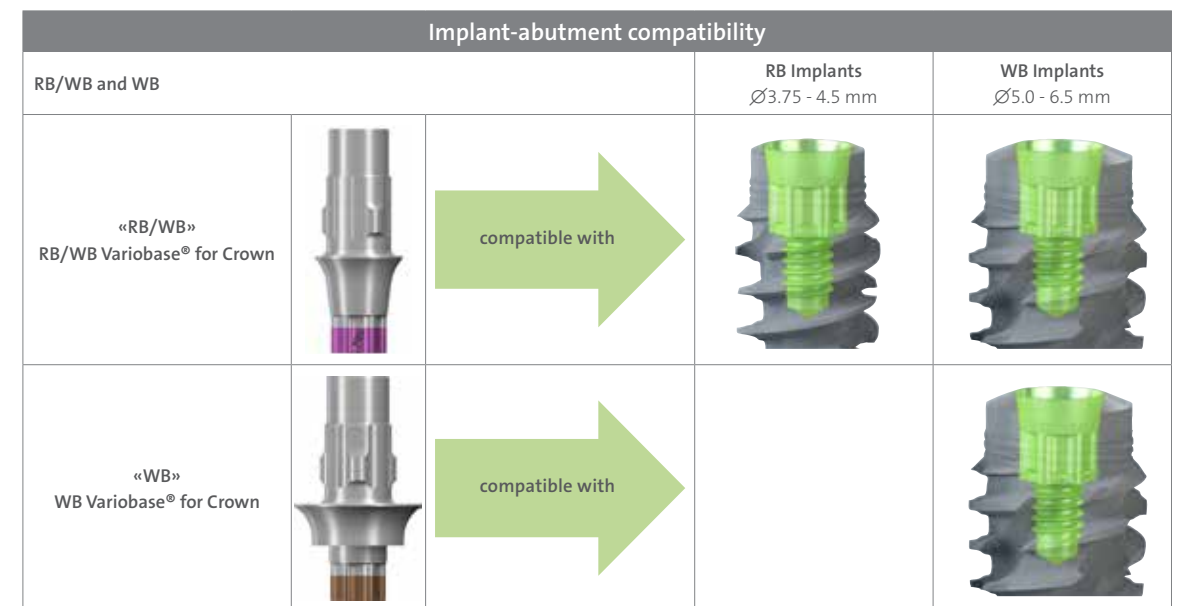

No WB abutments on RB implants!

Straumann North American Headquarters
 Straumann USA, LLC
 60 Minuteman Road
 Andover, MA 01810
 Phone 800/448 8168 (US) • 800/363 4024 (CA)
 Fax 978/747 2490
 www.straumann.us • www.straumann.ca


RB/WB prosthetics – fit on RB and WB implants (∅3.5 mm - ∅6.5 mm)

- crowns with slim emergence profiles
- bridges



WB prosthetics – fit only on WB implants (∅5.0 mm - ∅6.5 mm)

- crowns with wide emergence profiles

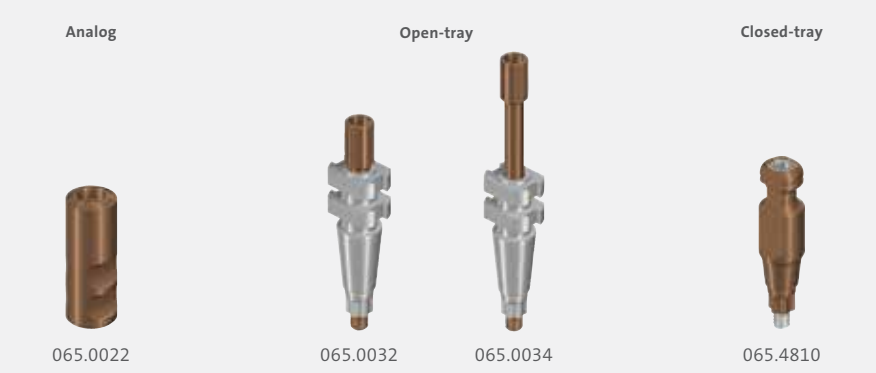

Temporary Abutments for Crown, AH 11 mm

		∅3.8 mm (RB/WB)	∅4.5 mm (RB/WB)	∅6.0 mm (RB/WB)
GH	1.5 mm	064.4362	064.4372	-
	2.5 mm	064.4363	064.4373	064.4382
	3.5 mm	064.4364	064.4374	064.4383

Temporary Abutments for Bridge, AH 5.0 mm

		∅4.5 mm (RB/WB)
GH	1.5 mm	064.4352

Temporary Abutments for Crown, AH 11 mm

		∅5.5 mm (WB)
GH	0.75 mm	064.4391
	1.5 mm	064.4392
	2.5 mm	-
	3.5 mm	-

Variobase® for Crown, AH 5.5 mm

		∅3.8 mm (RB/WB)	∅4.5 mm (RB/WB)
GH	1.5 mm	062.4934	062.4944
	2.5 mm	062.4935	062.4945
	3.5 mm	062.4936	062.4946

Variobase® for Crown AS, AH 5.5 mm

		∅4.5 mm (RB/WB)
GH	1.5 mm	062.4972

Variobase® for Bridge/Bar Cylindrical, AH 3.5 mm

		∅4.5 mm (RB/WB)
GH	1.5 mm	062.4961

Variobase® for Crown, AH 5.5 mm

		∅5.5 mm (WB)
GH	0.75 mm	062.4953
	1.5 mm	062.4954
	2.5 mm	-
	3.5 mm	-

Variobase® for Crown AS, AH 5.5 mm

		∅5.5 mm (WB)
GH	1.5 mm	062.4971

Burn-out Copings for Variobase® for Crown

		∅3.8 mm (RB/WB)	∅4.5 mm (RB/WB)
		065.0014	065.0015

Basal Screw

		065.0036
--	--	----------

Burn-out Copings for Variobase® for Crown AS

		∅4.5 mm (RB/WB)
		065.0018

Basal Screw AS

		065.0037
--	--	----------

Burn-out Copings for Variobase® for Bridge/Bar Cylindrical

		∅4.5 mm (RB/WB)
		065.0017, 065.0017V4

Basal Screw

		065.0036
--	--	----------

Burn-out Copings for Variobase® for Crown

		∅5.5 mm (WB)
		065.0016

Basal Screw

		065.0036
--	--	----------

Burn-out Copings for Variobase® for Crown AS

		∅5.5 mm (WB)
		065.0019

Basal Screw AS

		065.0037
--	--	----------

Screw-retained Abutments

Angle	∅4.6 mm (RB/WB)		
	0°	17°	30°
0.75 mm	-	-	-
1.5 mm	062.4722S	-	-
2.5 mm	062.4723S	-	-
3.5 mm	062.4724S	062.4733S	062.4743S
4.5 mm	062.4725S	062.4734S	062.4744S
5.5 mm	-	062.4735S	062.4745S

Closed-tray Impression for Screw-retained Abutments

		∅4.6 mm
Crown		025.2246
	Bridge/Bar	025.0014

Open-tray Impression for Screw-retained Abutments

		∅4.6 mm
Crown		025.2244
	Bridge/Bar	025.0012

Burn-out Coping for Variobase® for Bridge/Bar Cylindrical Coping

		∅4.6 mm
		023.0032

Variobase® for Bridge/Bar Cylindrical

		∅4.6 mm
Crown		023.4753
	Bridge	023.4754
	Bar	023.4755
incl. screw 023.4763		

Gold Copings

		∅4.6 mm
Crown		023.4753
	Bridge	023.4754
	Bar	023.4755
incl. screw 023.4763		

Occlusal Screw

		023.4763
--	--	----------

Lab Processing Screw

L 20mm	025.0006
L 10mm	025.0052

Anatomic Abutments

Angle	∅6.0 mm (RB/WB)		
	0°	17°	
GH	2.5 mm	062.4103	062.4153
	3.5 mm	062.4104	062.4154

CARES® Abutments (RB/WB)

TAN	
Gold Hue	
CoCr	

Individually CAD/CAM manufactured

Novaloc® (RB/WB)

Angle	∅3.8 mm (RB/WB)		
	0°	15°	
GH	1.5 mm	062.4521	-
	2.5 mm	062.4522	062.4527
	3.5 mm	062.4523	062.4528
	4.5 mm	062.4524	062.4529
	5.5 mm	062.4525	062.4530
	6.5 mm	062.4526	062.4531
	7.5 mm	-	062.4532

Processing Package titanium

		2010.601-STM
--	--	--------------

Processing Package PEEK

		2010.611-STM
--	--	--------------

CARES® Abutments (WB)

TAN	
Gold Hue	
CoCr	

Individually CAD/CAM manufactured